



CONTENT

Quick Start Video	01
Product Overview	02
Step 1: Get your printer started	03
Step 2: Label Loading	05
Step 3: Driver Download and Installation	07
For macOS	
Step 3-1: macOS: Driver Installation	08
Step 3-2: macOS: Printer Setup	11
For Windows	
Step 3-1: Windows: Driver Installation	14
Step 3-2: Windows: Printer Setup	17
Introduction of Status Light	23
Introduction of Feed Button	24
Maintenance	26
Tips for Preparation	27
Safety Notices	27



Logistics Label Printer Quick Start Guide

Printer usage flow

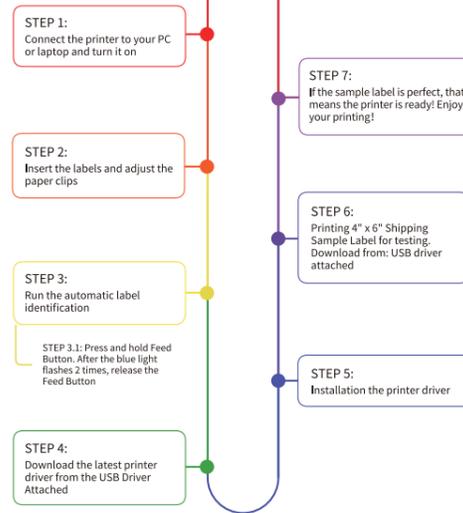

Quick Start Video

Important Tip:

Please watch the Getting Started Video on the USB Driver for a fast and easy setup.

- 1. Getting Started Video
 - 2. Driver
 - 3. Label Editor
 - 4. Setting tool
- Labels-Sample

The Logistics Label Printer is a very capable printer. You can print barcodes, shipping labels, name badges, warehouse labels, food nutrition labels, amazon FBA labels and labels of all sizes with it. It prints without the need of ink or cartridges. It's the perfect partner for your business with its economical, reliable and high-efficient features.

Please take a short time to watch the setup video. It will guide you through the setup process step by step.



Product Overview

Package contents

Printer*1, Power Cord*1, Power Adapter*1, USB Cable*1, USB Driver*1, Quick Start Guide*1, Start Label*1, TC Adapter*1



Please take a moment to thoroughly read this user guide. Incorrect operation may result in damage to the printer or your physical injury.

STEP 1 Get the printer started



1. Ensure that the printer is OFF. The power switch is switched to O. (I:On; O:Off)



2. Attach the power cord to the adapter.



3. Plug the adapter cable into the circular DC adapter connector of the printer.



4. Plug the power cord into socket.



5. Connect the USB cable to the printer.



6. Connect the other end of the USB cable to the computer.



7. Turn the printer ON with the power switch (I:On; O:Off)

STEP 2 Label Loading

The label printer is capable of working with label width range from 1" to 4.6" (25.4 to 117 mm). To print on different labels correctly, the printer needs to identify your label size before it starts printing.

To run the automatic label identification, please follow these steps:



1. Turn on the printer. (I:On; O:Off)



2. Adjust the paper guide to match the label size.



3. Insert label and ensure it is straight and smooth as shown. Note: The print side should face up.



4. Make sure the label is automatically caught by the printer.



5. Press and hold Feed Button. After the blue light flashes 2 times, release the Feed Button.



6. The printer will move the label back and forth to learn the gap size and other properties of your label.

NOTE: Please run the label size identification every time you change your label. (See picture 5 & 6)

Continue to Driver Installation

STEP 3 Driver Download and Installation

Download the latest printer driver from the USB Driver Attached.



- 1. Getting Started Video
 - 2. Driver
 - 3. Label Editor
 - 4. Setting tool
- Labels-Sample

Please run the downloaded software and follow the hints to complete the installation.



(Mac Driver Installer)




(Win Driver Installer)


Note: Before the installation, please ensure the printer is connected and turned on!

STEP 3.1 Driver Installation for macOS


(1) Follow the installation steps until you receive the "Installation was successful" message.




(2) Click "Apple" and go to "System Preferences". (3) Select "Printer & Scanners"




(4) Click "+" to add a printer




(5) Select "Label Printer" -> Click "Select Software" under "Use"



(6) Select "Label Printer" and click "OK"




(7) Click "Add"



STEP 3.2 Printer Setup for macOS

(1) Print a sample label: Open a desired file (e.g. a PDF) through Preview.




(2) Click "File" and choose "Print".



(3) Select "Show Details".




(4) Choose a paper size from "Paper Size".




① If there is no suitable label size for you, please click "Manage Custom Sizes" to add the size.


② Input width and height, then click "OK".




(5) Select "Printer Features" in "Preview", you can set up the printer properties here, such as "Media Tracking", "Darkness" and "Print speed".



- Select paper type in "Media Tracking". Choose among "Continuous", "Gap" or "Black Line".
- You can change the Printing Speed and the Darkness of your printing (Larger number means higher Darkness)

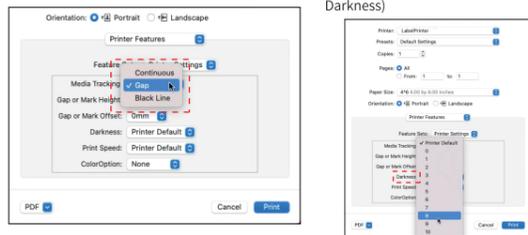


- You can change the Printing Speed and the Darkness of your printing (Larger number means higher Darkness)
- After setup, click "Print"

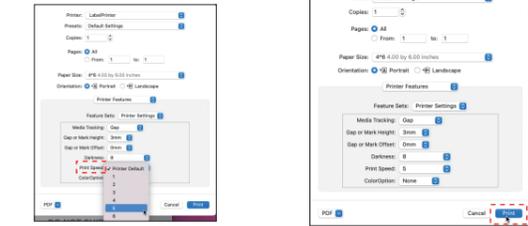


STEP 3.1 Driver Installation for Windows


- Double click on the installer to begin. Follow the installation steps until finish.

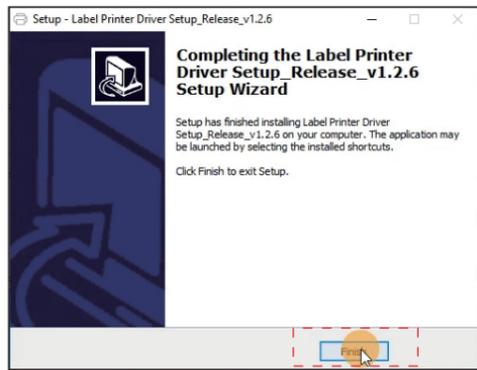

- To check if the printer is connected successfully:
 - Right click on "This PC", choose "Properties", then click on "Control panel" -> "Devices and Printers"

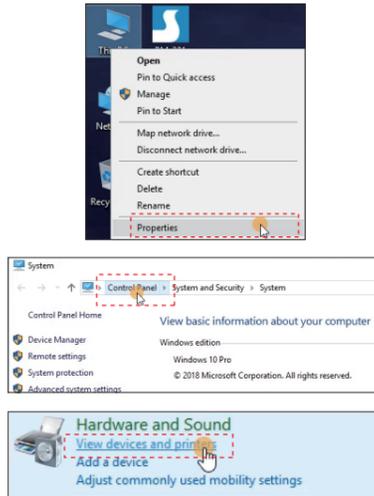


- Right click on "Label Printer" -> "Printer Properties" -> Click on "Print Test Page"

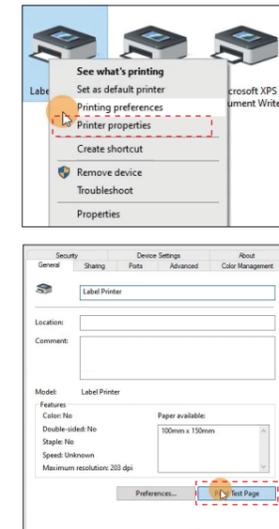


STEP 3.2 Printer Setup for Windows

- Set as default printer
 - Right click on "Label Printer" -> "Set as default printer".

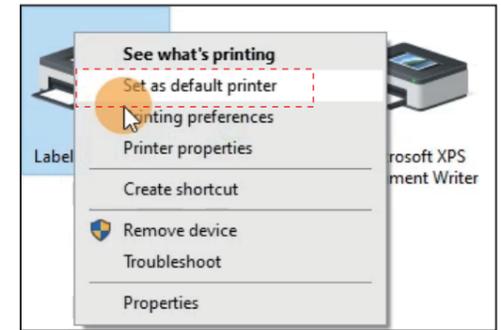


- Select a paper type


- Right click on "Label Printer" -> choose "Printer Preferences".




- Go to the "Page Setup". You can choose the size you need in "Paper Name".





- If there is no suitable label size for you, please click on "New" to create the needed size.



- Change Paper name and input the width and the height, click "OK".




- Set up Print speed and Darkness:
 - Go to "Option". You can change the printing speed and the Darkness of your printer (Larger number means higher Darkness) and click "Apply" -> "OK".
 - Click "Adjust the sensor" to adjust printer sensor, then click "Study gap label" to let the printer learn the gap label.
 - If printer flashes the blue light, it means that the learning has failed, then you need to repeat the above 2 button clicks again.




- Print a sample label: Open a desired file (e.g. a PDF).


- Click on "P"

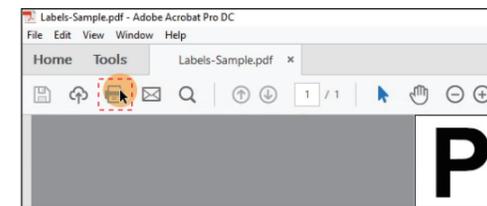

- Select the printer "Label Printer"

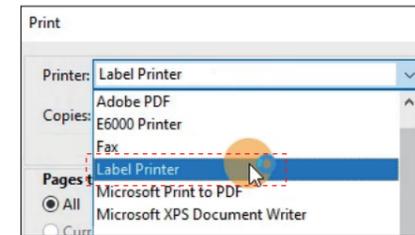

- Preview and check the print size, then click "Print".

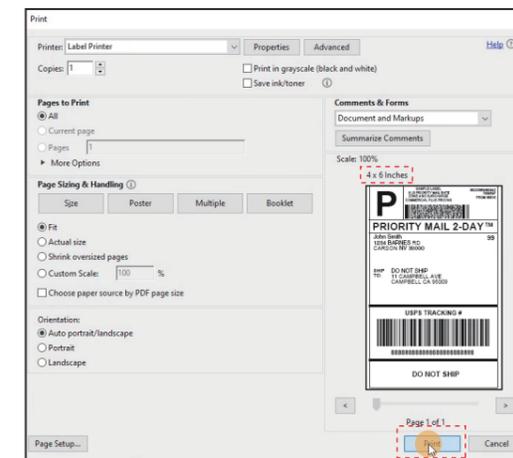

LED STATUS LIGHT



Light	Printer Status
Solid blue	Standby and Ready
Blue flashing slowly	Label jams or label detection error
Blue flashing quickly	Wrong media tracking
Solid red	Printer head is over-heated
Red flashing slowly	Paper shortage
Red flashing quickly	Cover is not closed
Solid purple	Printing
Purple flashing quickly	Pause printing

FEED BUTTON



Desired Action	Execution
Skip a label	When the printer is standby and ready (not in the middle of printing), press the Feed Button once.
Print test page	Insert the label, ensure it is straight and smooth. When the printer is standby, press and hold the Feed Button for about 4 seconds. After the blue light flashes 1 times , then release the Feed Button.
Run the automatic label identification (for labels with gaps)	Insert the label, ensure it is straight and smooth. When the printer is standby, press and hold the Feed Button for about 6 seconds. After the blue light flashes 2 times , then release the Feed Button.

Desired Action	Execution
Run the automatic label identification (for labels with black marks)	Insert the label, ensure it is straight and smooth. When the printer is standby, press and hold the Feed Button for about 8 seconds. After the blue light flashes 3 times , then release the Feed Button.
Restore factory setting	Insert the label, ensure it is straight and smooth. When the printer is standby, press and hold the Feed Button for about 10 seconds. After the blue light flashes 4 times , then release the Feed Button.
Sensor calibration	Unload the label. When the printer is standby, press and hold the Feed Button for about 12 seconds. After the blue light flashes 5 times , then release the Feed Button. Run the automatic label identification again after sensor calibration.
Pause printing	When the printer is printing, press the Feed Button once.
Resume printing	When the printer pauses printing, press the Feed Button once to resume printing.
Clear printing data	When the printer pauses printing, press the Feed Button twice to clear the printing data.

Maintenance

- Printer head Cleaning Steps

- Turn the printer off, remove the power cord and open the cover. (See picture 1)
- Wait until the printer head cools down. (The printer head may be very hot after printing)
- Completely clean the printer head using an alcohol swap (NOT with WATER). (See picture 2)
- Wait until the alcohol has completely vaporized, then close the cover.
- Connect the power cord and print a test page to check if it is clean.



Picture 1



Picture 2

NOTICE
Ensure power is off when performing maintenance.
Do not touch or scratch the printer head, the roller or the sensors.

Tips for Preparation

- Avoid using poor quality labels as they may damage the printer.
- Clean the printer head regularly.
- Connect the Printer to the same USB port on your computer every time. This can avoid creating duplicate copies on the printer.
- If paper is jammed, please refer to "Printer head Cleaning Steps" in "Maintenance".

Safety Notices

- Do not bend the power cord excessively or place objects on the cord.
- Keep the printer out of reach of children.
- Use only approved accessories and do not try to disassemble or repair the unit by yourself.
- Keep the printer away from water or other objects that could penetrate the components.
- Unplug the printer when it is not in use for long periods.
- Do not use the printer if you find any irregularities as these could result in fire or electrocution.
- Do not touch the printer head. The printer head can be over-heated after printing.

